


# **Submittal**


# SBVD Dual Blower Arr. 3 w/Electric Heat


Model SBVD Direct Drive Dual Blower Coil Unit Discharge ARGT. 3 w/Blow-Thru Electric Heat

#### NOTES:

- 1.All dimensions are Inches [millimeters].All dimensions are  $\pm 1/4$ " [6mm]. Metric values are soft conversion.
- 2.Right hand unit shown, left hand unit opposite. Motor/drive location may be specified Left or Right Hand. Standard control enclosure location matches motor/drive position.
- 3. Provide sufficient clearance to permit access to controls and comply with applicable codes and ordinances.
- 4.See drawing BC-SBHD-16.0 for filter rack details.
- 5.Base rail is optional on the base unit. See drawing BC-SBHD-
- 18.0. Base rails must be used with mixing box.
- 6.See coil connection details drawings for Coil connection sizes and locations.
- 7.Units with electric heat only (No chilled water, DX, hot water or steam coils) and a drain pan will be supplied with condensate drain outlet the same side as the electric heat control enclosure

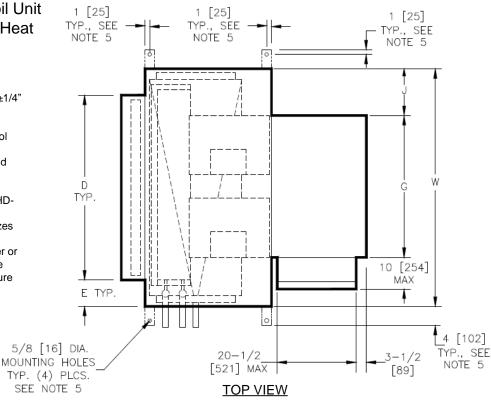



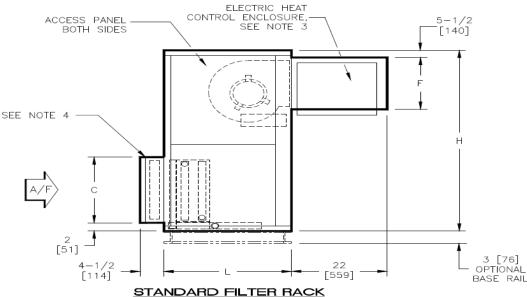

## SIDE VIEW

### **DIMENSIONS**

SIZE	UNIT	МО	DEL	L	W	Н	С	D	E	F	G	J
30	10	Χ	8	30	59	56	25	51	4	11-7/8	34-1/4	12-3/8
	[254	Χ	203]	[762]	[1499]	[1422]	[635]	[1295]	[102]	[302]	[870]	[314]
40	10	Χ	8	30	68	59	25	59	4-1/2	11-7/8	34-1/4	16-7/8
	[254	Χ	203]	[762]	[1727]	[1499]	[635]	[1499]	[114]	[302]	[870]	[429]

New	08/04/22	SP	New Release		
Revision Date	Version Date	Initiated By	Description		

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage retrieval system without permission in writing from Superior Rex.